



**Fig. 1**  
 (PRIOR ART)

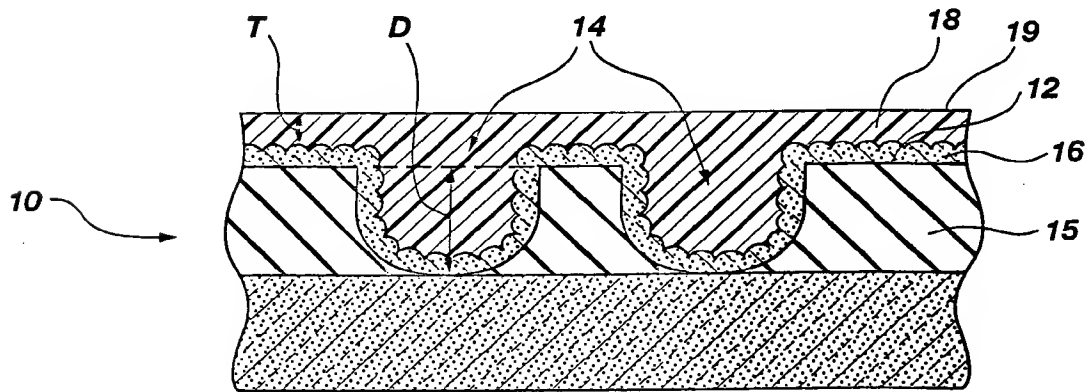

**Fig. 2**

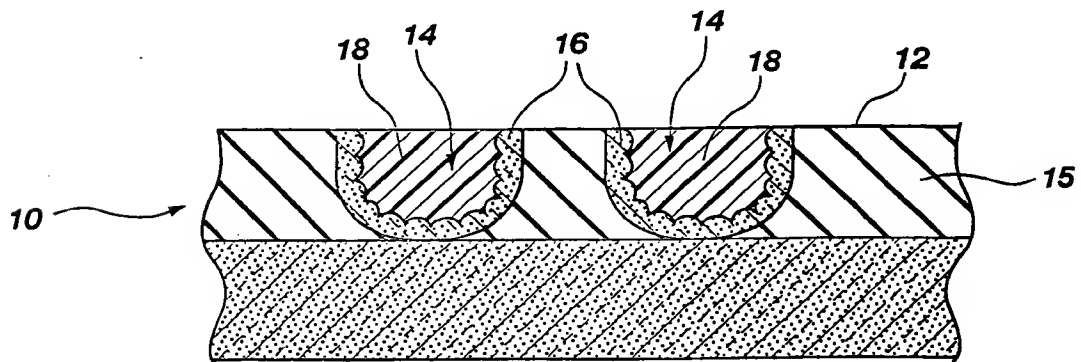


**Fig. 3**

Inventor: John Whitman et al.  
Serial No.: Not Yet Assigned  
Docket No.: 2269-4294.3US


Docket No.: 2269-4294.3US

A cross-sectional view of a substrate assembly. The assembly consists of a top layer 10 and a bottom layer 15. The top layer 10 has a wavy upper surface 12 and a wavy lower surface 16. The bottom layer 15 is hatched. There are two openings 14 in the top layer 10, which are filled with a material having a dotted pattern.

**Fig. 4**

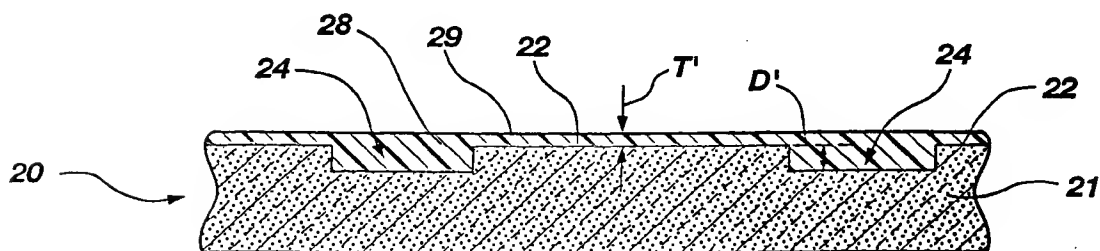

**Fig. 5**

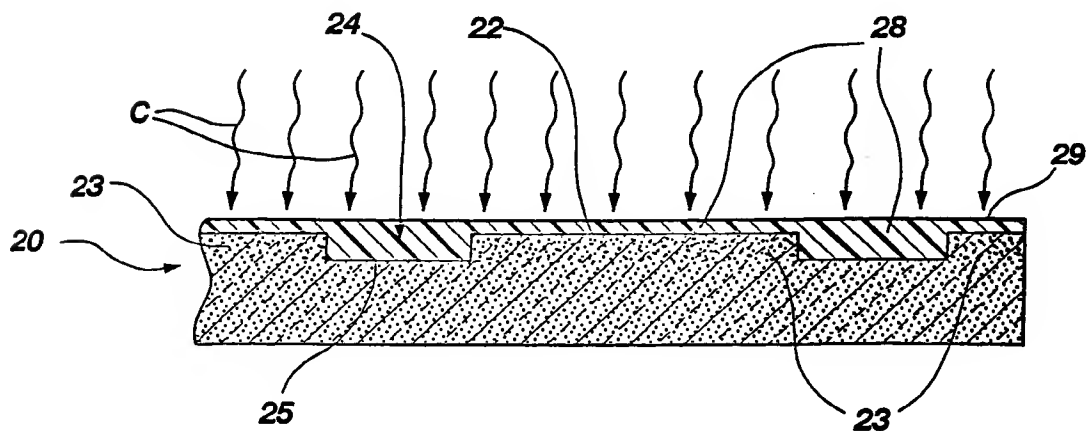

**Fig. 6**

[illegible]

3/5

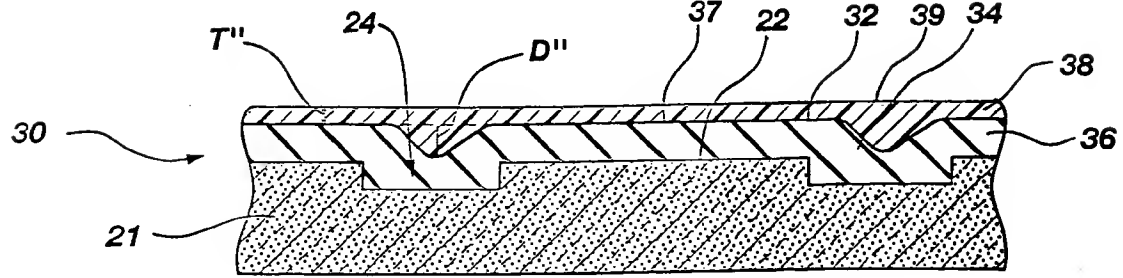


Fig. 7

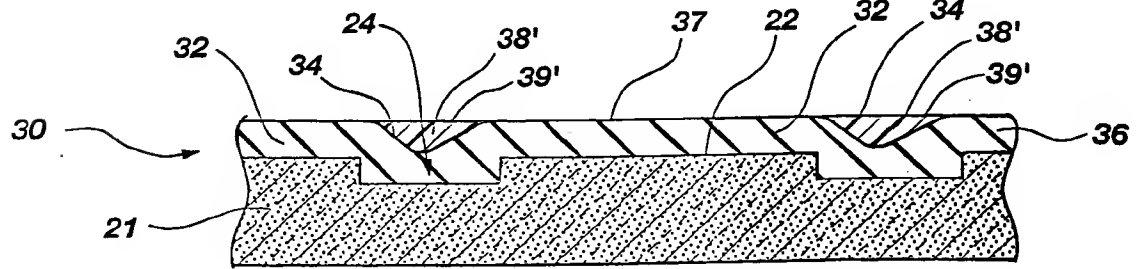


Fig. 8

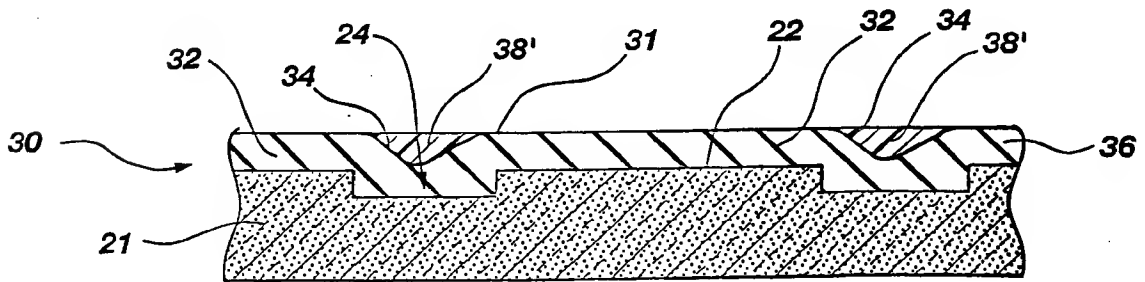


Fig. 9

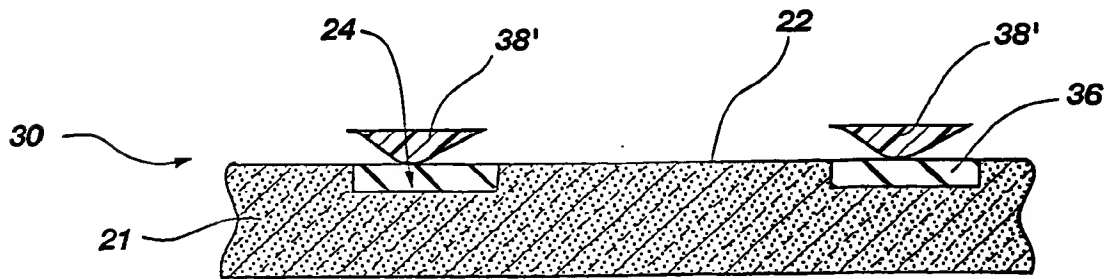


Fig. 10

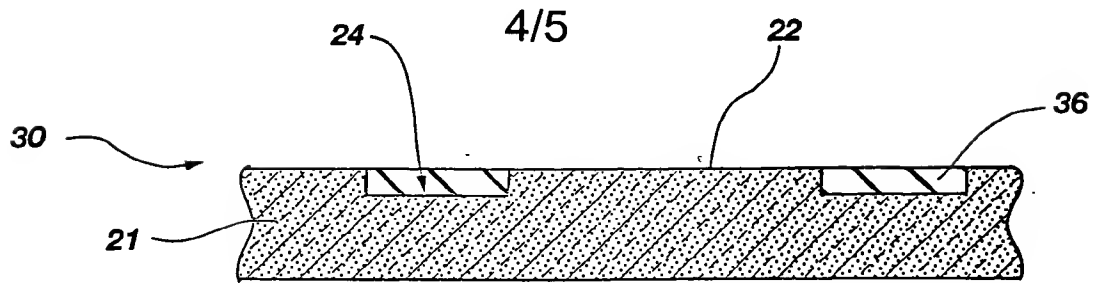


Fig. 11

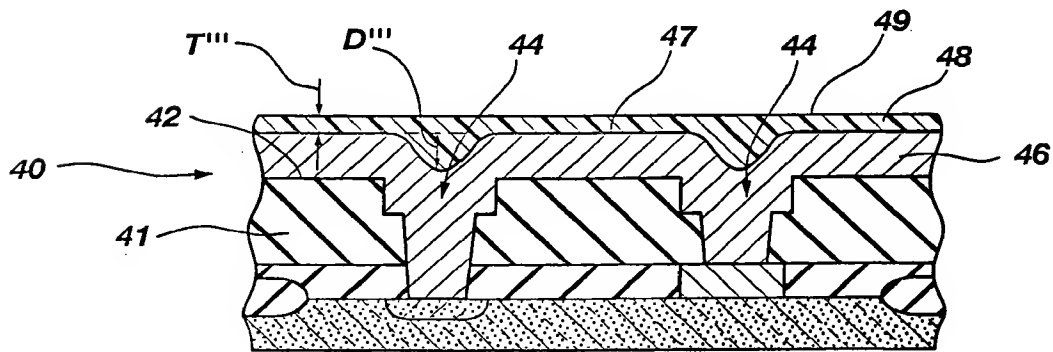


Fig. 12

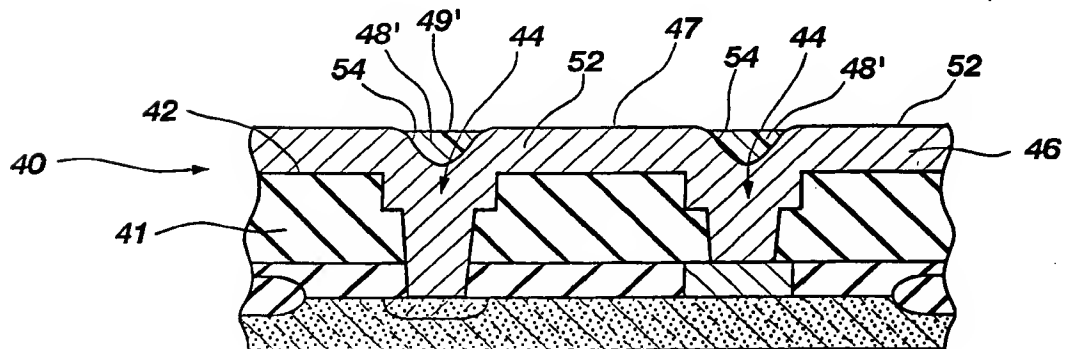


Fig. 13

FIG. 11

TITLE: SPIN COATING FOR MAXIMUM FILL  
CHARACTERISTIC YIELDING  
A PLANARIZED THIN FILM SURFACE

Inventor: John Whitman et al.

Serial No.: Not Yet Assigned

Docket No.: 2269-4294.3US

5/5

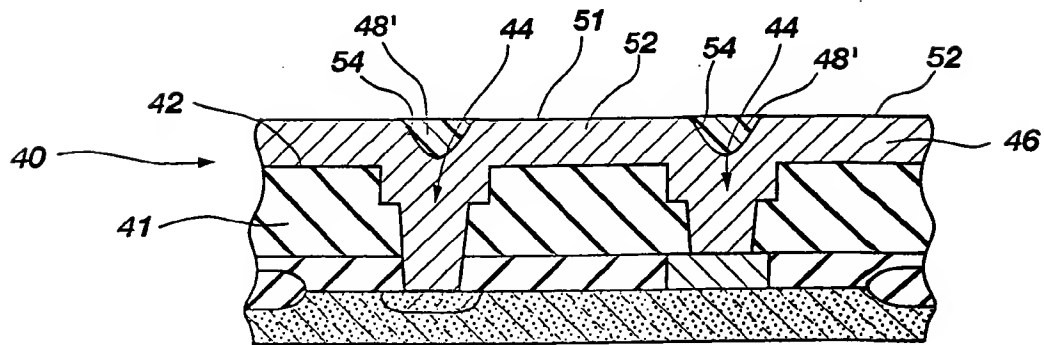


Fig. 14

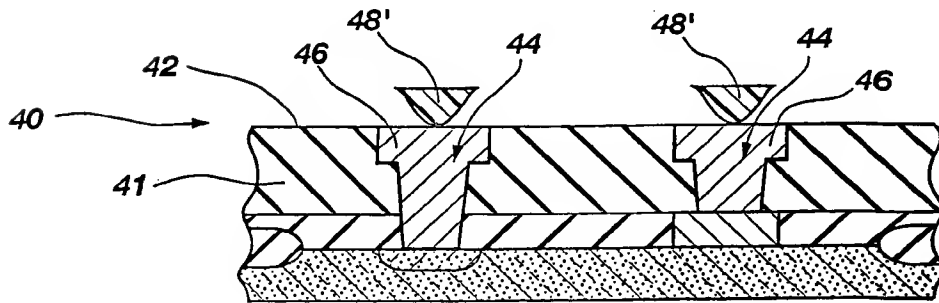


Fig. 15

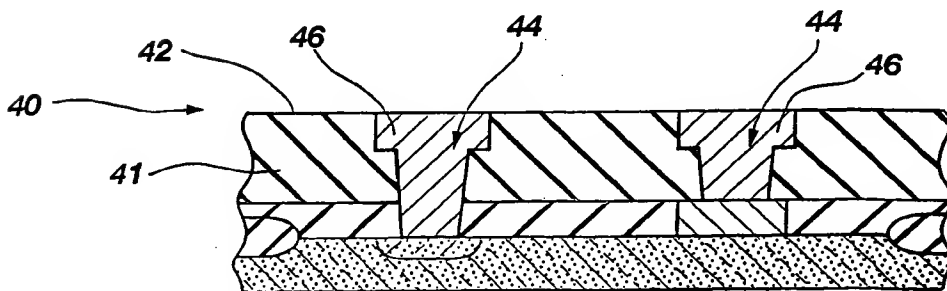


Fig. 16